



FCC TEST REPORT

Applicant: Jiuhe IoT (Shenzhen) Information Technology Co., Ltd
Address: 529, No. 93 Qianjin 2nd Road, Hexi Community, Xixiang Street, Bao'an District, Shenzhen, China
Manufacturer: Jiuhe IoT (Shenzhen) Information Technology Co., Ltd
Address: 529, No. 93 Qianjin 2nd Road, Hexi Community, Xixiang Street, Bao'an District, Shenzhen, China
EUT: Vehicle positioning terminal
Trade Mark: JIUHEWULIAN
Model Number: CK100
CK100A, CK100B, CK101, CK101A, CK101B, CK102, CK102, CK102B, CK103, CK103A, CK103B, CK105, CK105A, CK105B, CK106, CK106A, CK106B, CK108, CK108A, CK108B, CK201, CK201A, CK201B, CK203, CK203A, CK203B, CK205, CK205A, CK205B, CK206, CK206A, CK206B, CK208, CK208A, CK208B, CK300, CK300A, CK300B, CK301, CK301A, CK301B, CK302, CK302A, CK305, CK305A, CK305B, CK306, CK306A, CK306B, CK308, CK308A, CK308B, CK500, CK500A, CK500B, CK501, CK501A, CK501B, CK503, CK503A, CK503B, CK505A, CK503B, CK508, CK508A, CK508B, CK510, CK510A, CK510B, CCK608, CK800, CK801, CK803, CK808, W102, W208, CT10, GT08, GFO6R, GFO6T, BSJ-EGO5E, T94, T92, 109
Date of Receipt: Feb. 25, 2025
Test Date: Feb. 25, 2025 - Mar. 05, 2025
Date of Report: Mar. 05, 2025
Prepared By: Shenzhen DL Testing Technology Co., Ltd.
Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China
Applicable Standards: FCC Part 15 Subpart B
ANSI C63.4:2014
Test Result: Pass
Report Number: DL-250227006ER

Prepared (Test Engineer): Ken Tan
Reviewer (Supervisor): Jack Bu
Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.

**TABLE OF CONTENT**

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	3
3. GENERAL INFORMATION	4
4. TEST INSTRUMENT USED	5
5. CONDUCTED EMISSION TEST	6
6. RADIATION EMISSION TEST	8
7. SETUP PHOTOGRAPHS	12
8. EUT PHOTOGRAPHS	13

**1. VERSION**

Version No.	Date	Description
00	Mar. 05, 2025	Original

2. TEST SUMMARY

EMC Emission				
Standard	Test Item	Limit	Result	Remark
FCC PART 15 B	Conducted Emission at power ports	Class B	N/A	
	Radiated Emission below 1GHz	Class B	PASS	
	Radiated Emission above 1GHz	Class B	N/A	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) Test Facility: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

(3) The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing DL Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the DL Testing, responsible for this Test Report.



3. GENERAL INFORMATION

3.1 Description of Device (EUT)

EUT: Vehicle positioning terminal

Trade Mark: JIUHEWULIAN

Model Number: CK100
CK100A, CK100B, CK101, CK101A, CK101B, CK102, CK102, CK102B, CK103,
CK103A, CK103B, CK105, CK105A, CK105B, CK106, CK106A, CK106B,
CK108, CK108A, CK108B, CK201, CK201A, CK201B, CK203, CK203A,
CK203B, CK205, CK205A, CK205B, CK206, CK206A, CK206B, CK208,
CK208A, CK208B, CK300, CK300A, CK300B, CK301, CK301A, CK301B,
CK302, CK302A, CK305, CK305A, CK305B, CK306, CK306A, CK306B, CK308,
CK308A, CK308B, CK500, CK500A, CK500B, CK501, CK501A, CK501B,
CK503, CK503A, CK503B, CK505A, CK503B, CK508, CK508A, CK508B,
CK510, CK510A, CK510B, CCK608, CK800, CK801, CK803, CK808, W102,
W208, CT10, GT08, GFO6R, GFO6T, BSJ-EGO5E, T94, T92, 109

Test Model: CK100

Model difference: All models are same as the samples except model name and appearance color,
they have the same structure and circuit.

Power Supply: Input: DC 12-36V

Working Frequency: Below 108MHz

NOTE:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (2) The EUT's all information provided by client.

3.2 Tested System Details

None.

3.3 Block Diagram of Test Set-up



3.4 Test Mode Description

Mode1. On Mode

3.5 Test Auxiliary Equipment

None.

3.6 Test Uncertainty

Conducted Emission Uncertainty : $\pm 2.56\text{dB}$

Radiated Emission Uncertainty : $\pm 3.24\text{dB}$

**4. TEST INSTRUMENT USED****For Conducted Emission Test (843 Shielded Room)**

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
Clamp	COM-POWER	CLA-050	431072	Nov. 02, 2024	Nov. 01, 2025
3-Loop Antenna	DAZE	ZN30401	13021	Nov. 02, 2024	Nov. 01, 2025
ISN T8	Schwarzbeck	NTFM 8158	101135	Nov. 01, 2024	Oct. 31, 2025
ISN T5	Schwarzbeck	NTFM 8158	101136	Nov. 01, 2024	Oct. 31, 2025
843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025
843 Cable 1#	ChengYu	CL Cable	002	Nov. 01, 2024	Oct. 31, 2025

For Radiated Emission Test (966 chamber)

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
966 chamber	YIHENG	966 Room	966	Nov. 06, 2023	Nov. 05, 2026
Spectrum Analyzer	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
EMI Receiver	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
Amplifier	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
Amplifier	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
Broadband Trilog Antenna	Schwarzbeck	VULB9162	00306	Nov. 02, 2024	Nov. 01, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	02139	Nov. 02, 2024	Nov. 01, 2025
966 Cable 1#	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
966 Cable 2#	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025

Other


Name	Manufacturer	Model	Software version
EMC Conduction Test System	FALA	EZ_EMG	EMC-CON 3A1.1
EMC radiation test system	FALA	EZ_EMG	FA-03A2



5. CONDUCTED EMISSION TEST

5.1 Block Diagram of Test Setup

For Mains Terminals Test

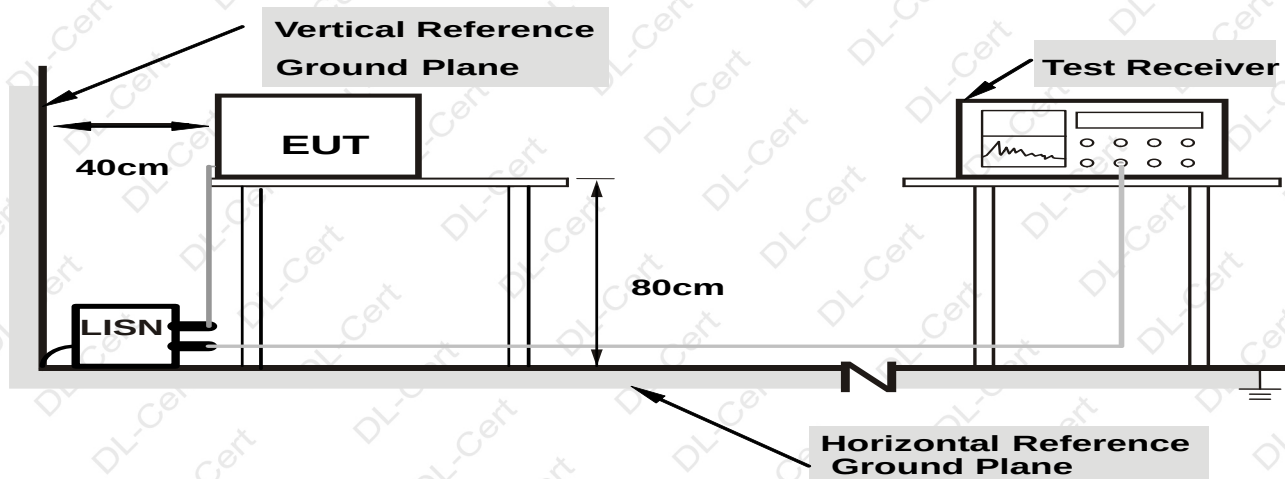

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.2 Test Standard and Limit

FCC PART 15 B

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15~0.50	66 ~ 56*	56 ~ 46*
0.50~5.00	56	46
5.00~30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

5.3 EUT Configuration on Test

The following equipment's are installed on conducted emission test to meet FCC PART 15 B requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

5.4 Operating Condition of EUT

5.4.1 Setup the EUT and simulators as shown in Section 5.1.

5.4.2 Turn on the power of all equipments.

5.4.3 Let the EUT work in test modes and test it.



5.5 Test Procedure

The EUT is put on the table and connected to the AC mains through a Artificial Mains Network (AMN) or ISN. This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the **ANSI C63.4** regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESR) is set at 10KHz.

The frequency range from 150 KHz to 30 MHz is investigated.

5.6 Test Result


The EUT is powered by DC, no requirements for this item.




6. RADIATION EMISSION TEST

6.1 Block Diagram of Test Setup

Below 1GHz

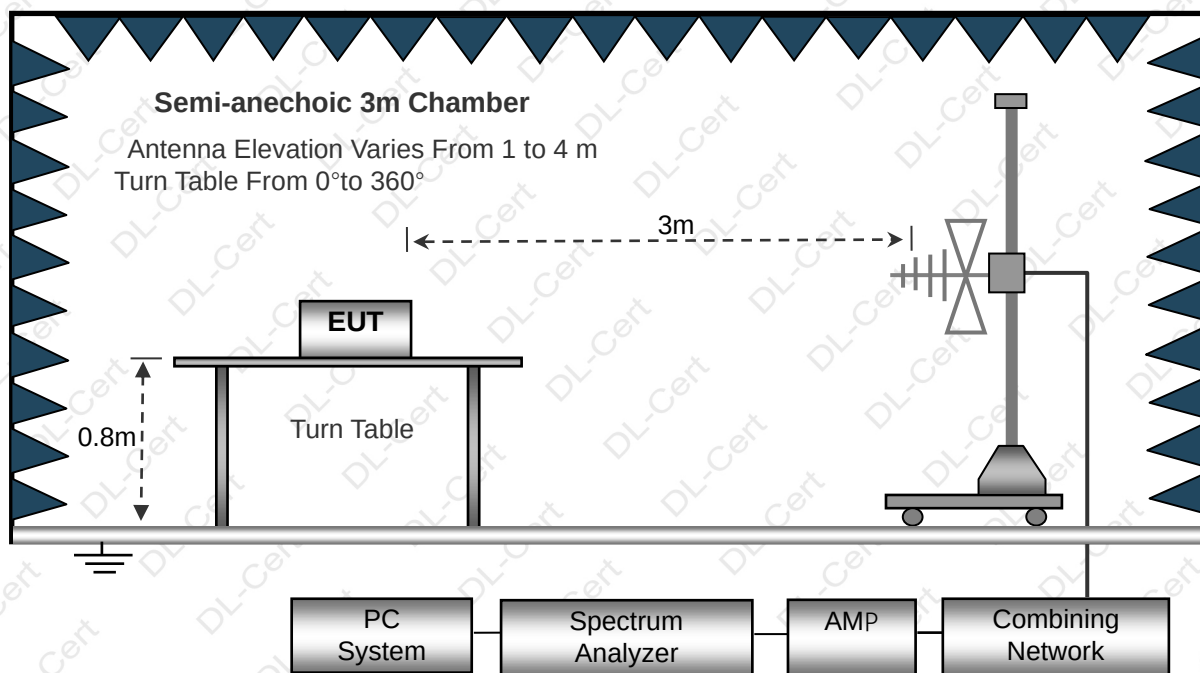

Above 1GHz

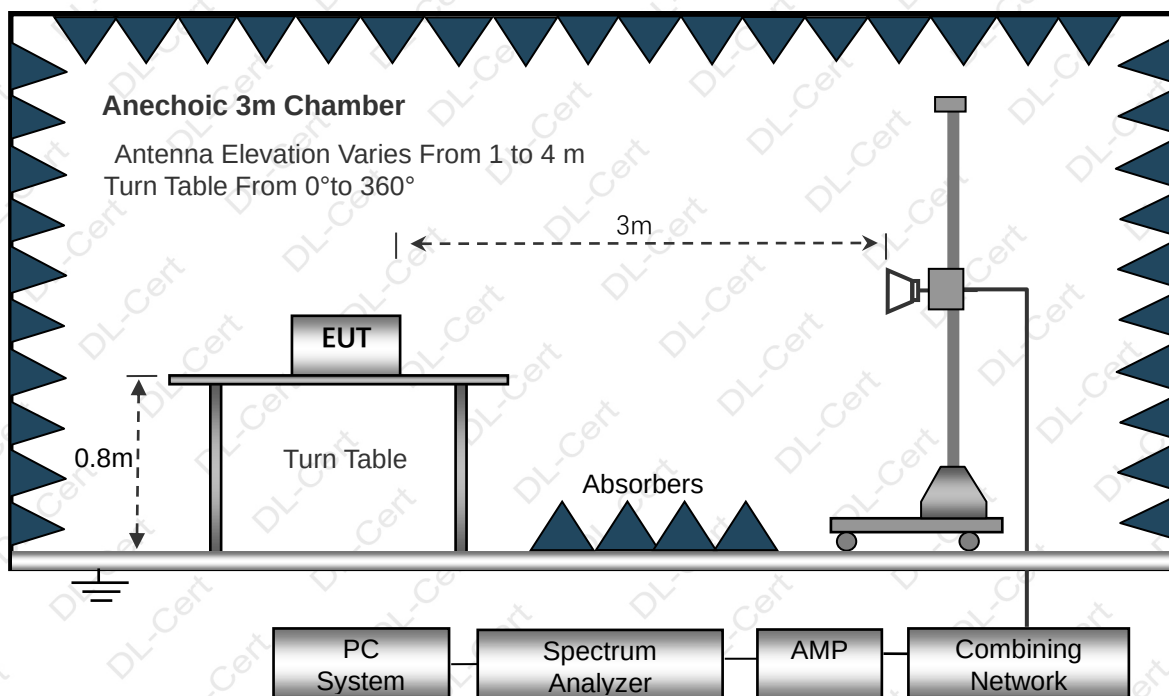

6.2 Test Standard and Limit

FCC PART 15 B

Below 1GHz



Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB μ V/m)
30 ~ 88	3	40.0
88 ~ 216	3	43.5
216 ~ 960	3	46.0
960 ~ 1000	3	54.0

Above 1GHz

Frequency MHz	Distance (Meters)	Field Strengths Limits dB(μ V)/m	Detector
1000~6000	3	74.0	PEAK
1000~6000	3	54.0	AVERAGE

Remark:

(1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

6.3 EUT Configuration on Test

The FCC PART 15 B regulations test method must be used to find the maximum emission during radiated emission test.

The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 5.3.

6.4 Operating Condition of EUT

Same as conducted emission test, which is listed in Section 5.4 except the test set up replaced as Section 6.2.

6.5 Test Procedure

1) The radiated emissions test was conducted in a semi-anechoic chamber.

2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.

3) Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.

4) The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

5) The bandwidth setting on the field strength meter (R&S Test Receiver ESCI) is set at 120KHz.

6) The frequency range from 30MHz to 1000MHz is checked.

6.6 Test Result


PASS

Please refer to the following page.



Radiation Emission Test Data

Temperature:	24.5℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test Mode:	Mode 1

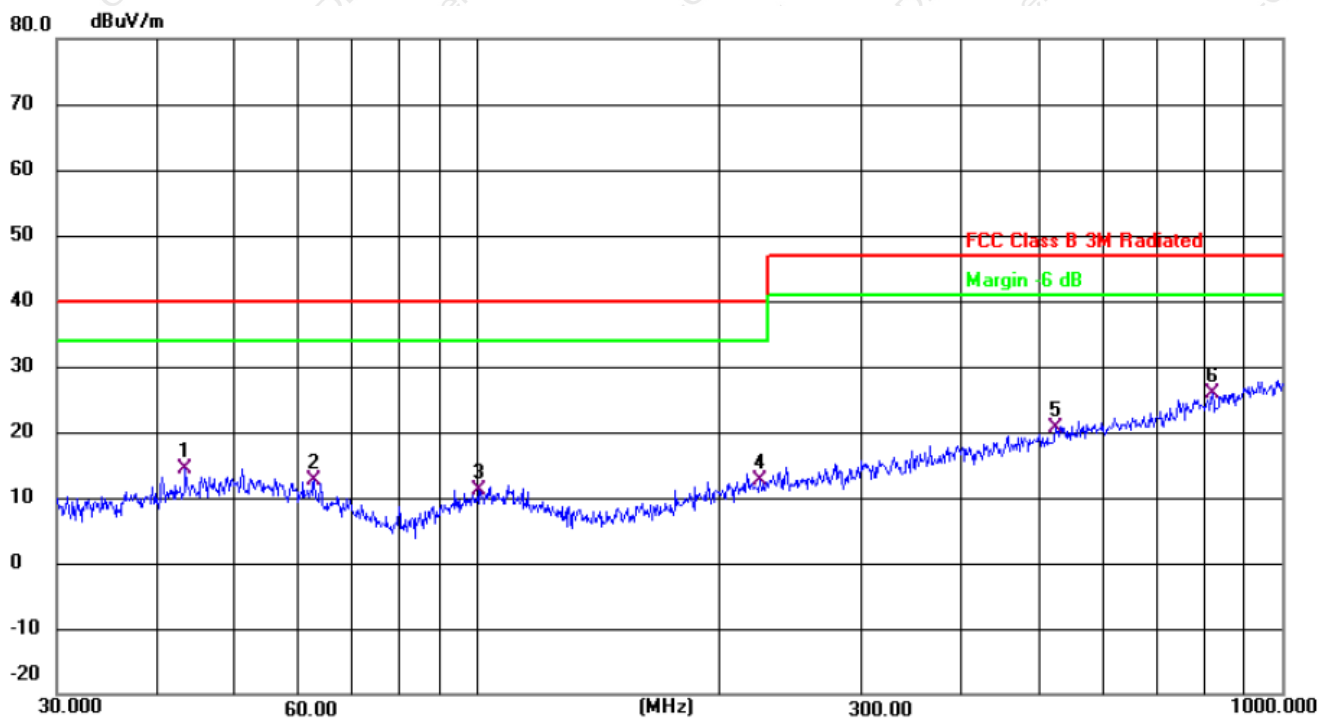

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		43.3534	27.81	-13.34	14.47	40.00	-25.53	QP
2		62.6505	27.07	-14.43	12.64	40.00	-27.36	QP
3		100.5806	26.05	-14.80	11.25	40.00	-28.75	QP
4		224.5192	26.59	-14.05	12.54	40.00	-27.46	QP
5		522.7178	27.76	-7.06	20.70	47.00	-26.30	QP
6	*	818.8338	28.13	-2.35	25.78	47.00	-21.22	QP

Remark:


Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;



Radiation Emission Test Data

Temperature:	24.5℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test Mode:	Mode 1

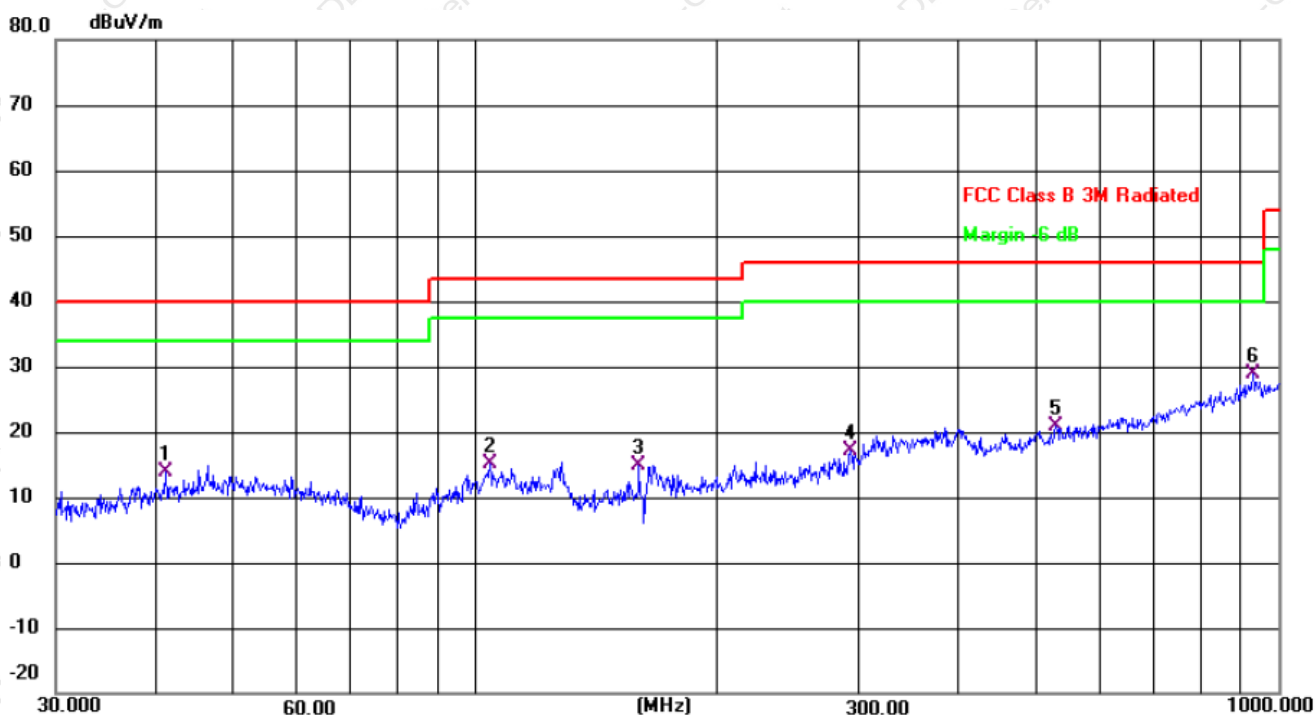

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		41.1319	27.43	-13.64	13.79	40.00	-26.21	QP
2		104.1701	29.71	-14.52	15.19	43.50	-28.31	QP
3		159.7844	32.23	-17.41	14.82	43.50	-28.68	QP
4		293.0842	29.21	-12.15	17.06	46.00	-28.94	QP
5		528.2458	27.70	-6.78	20.92	46.00	-25.08	QP
6	*	929.0081	28.71	0.06	28.77	46.00	-17.23	QP


Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;






7. SETUP PHOTOGRAPHS

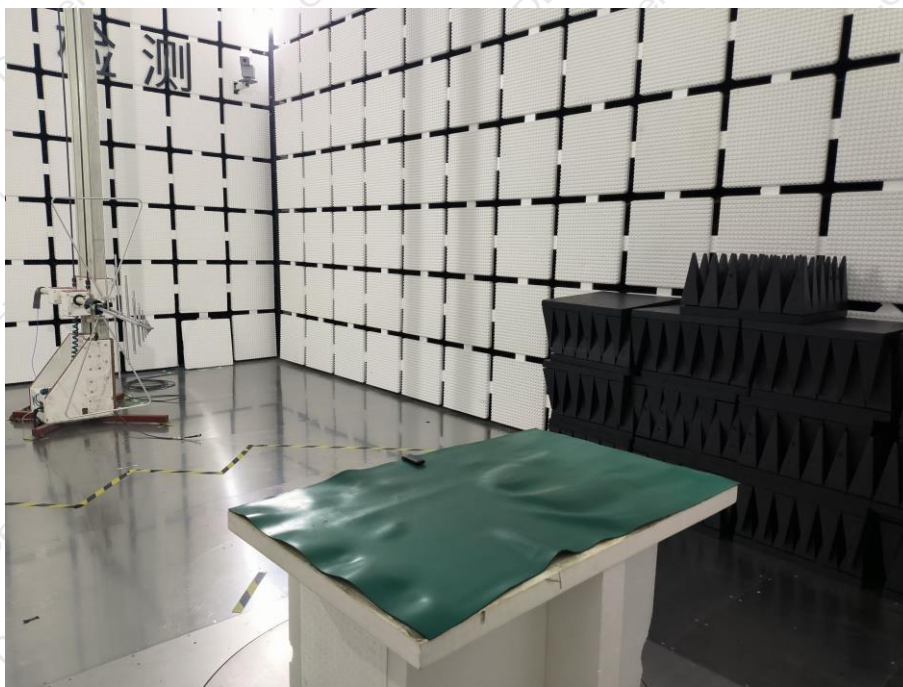






8. EUT PHOTOGRAPHS

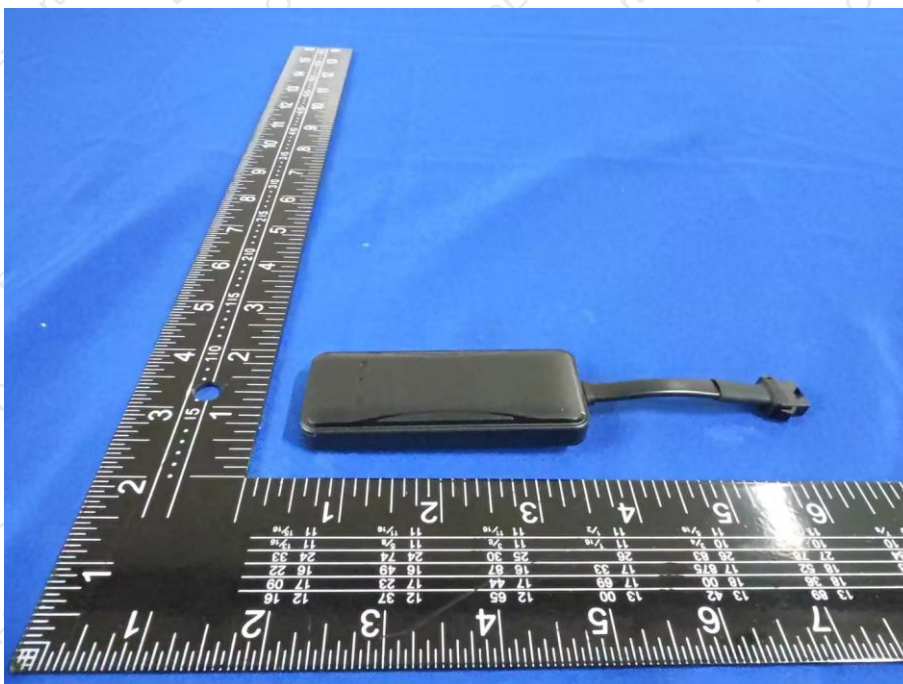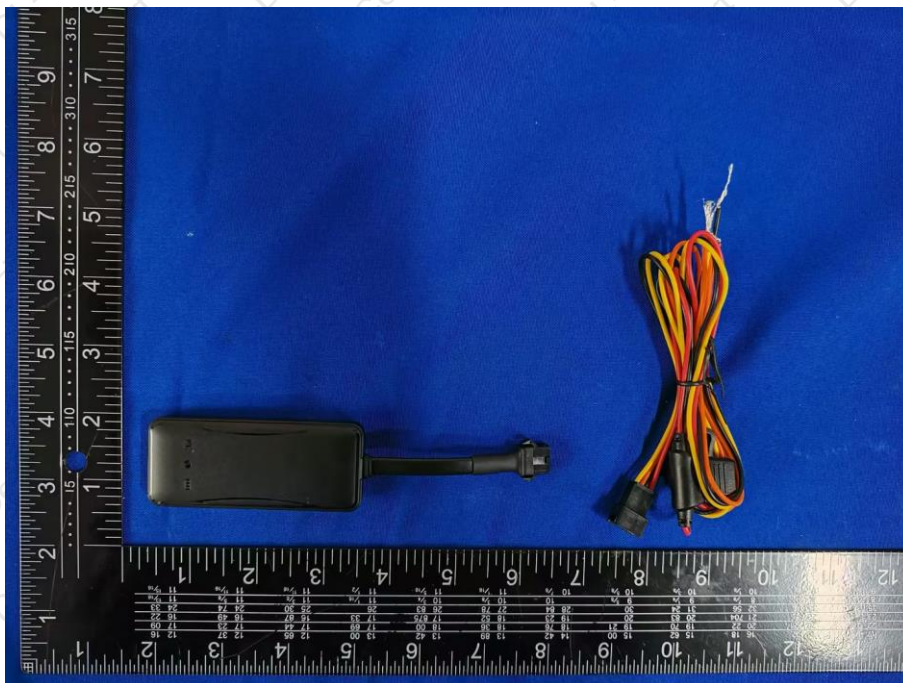

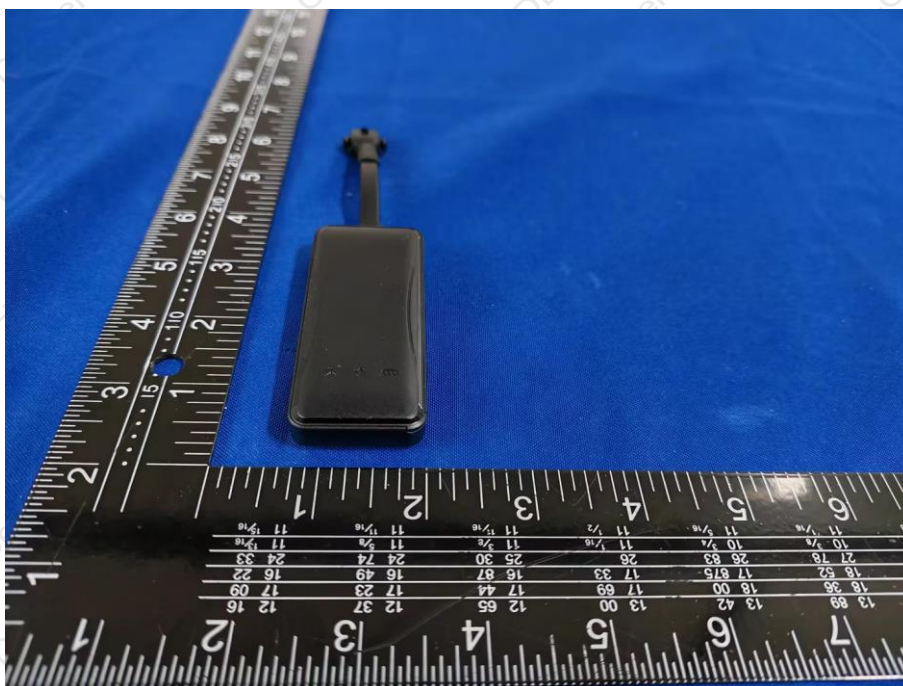

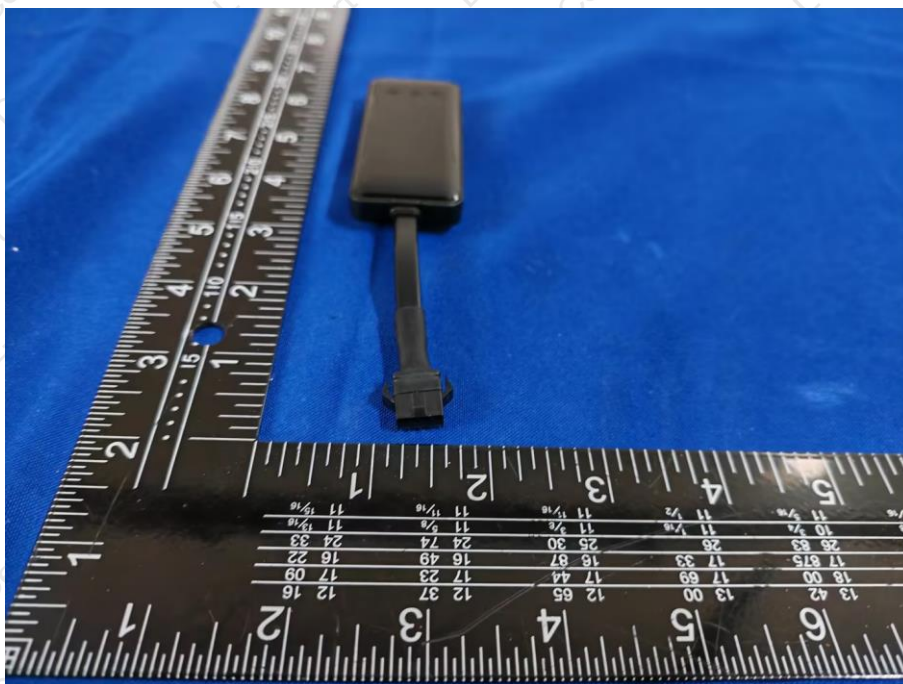

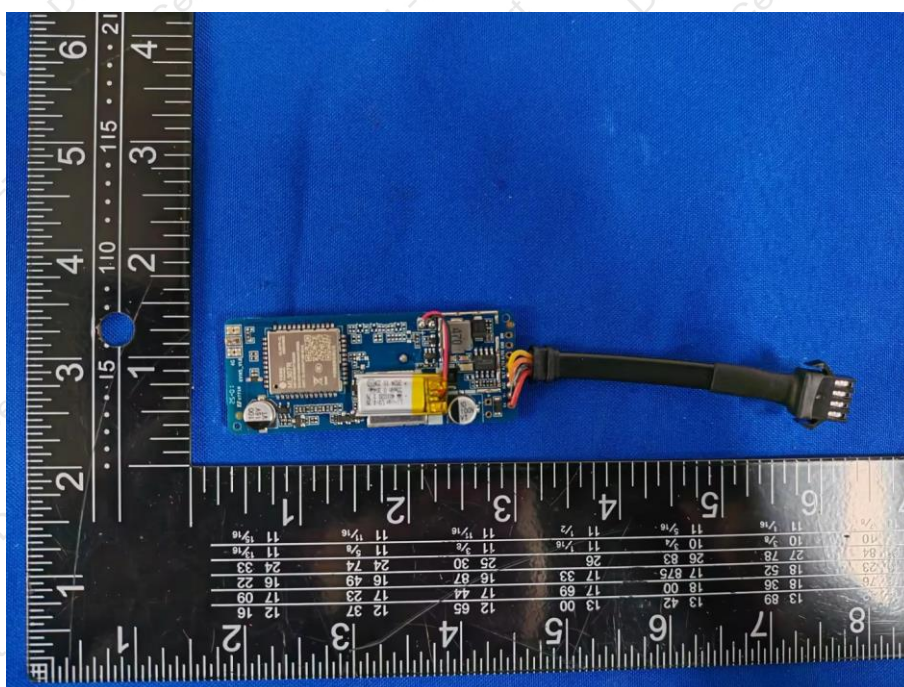

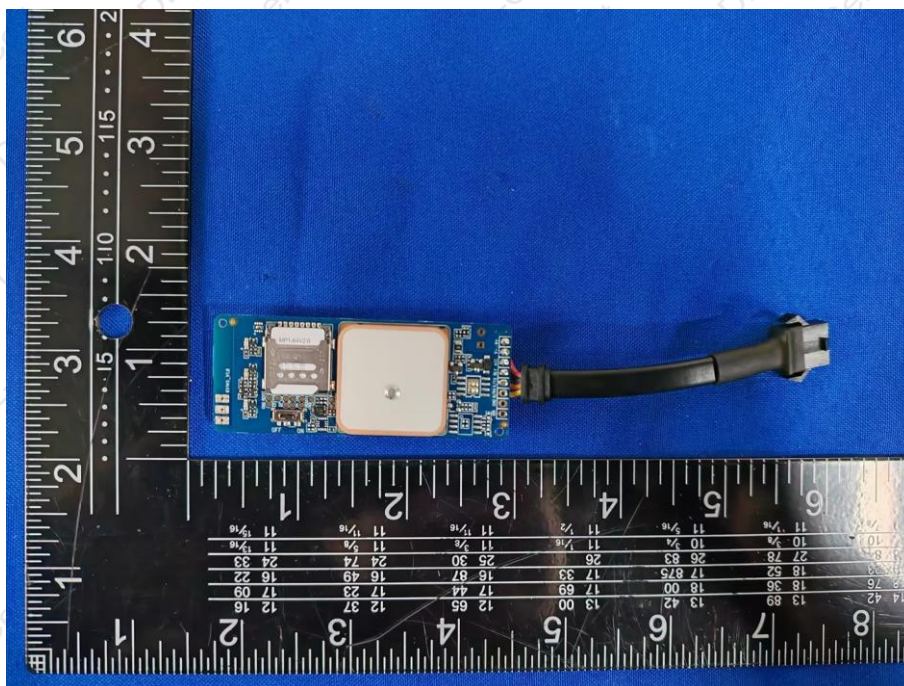

***** END OF REPORT *****